




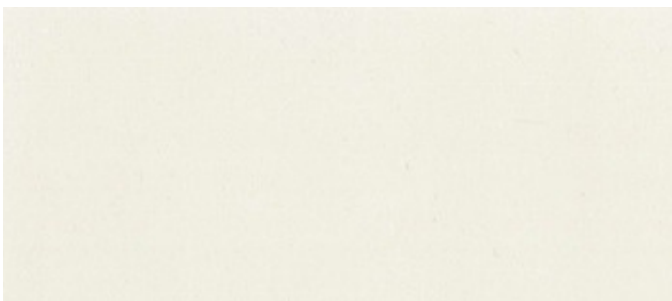


3001

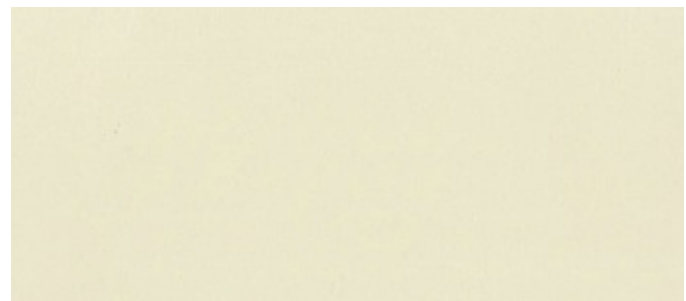

3008

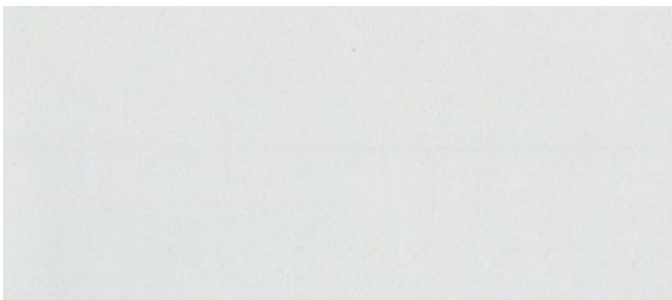

3011

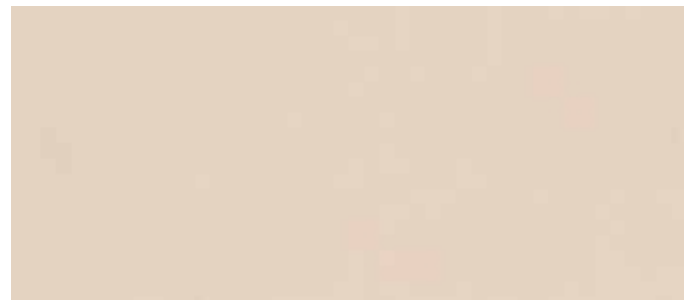

3004




3005



3010



3006

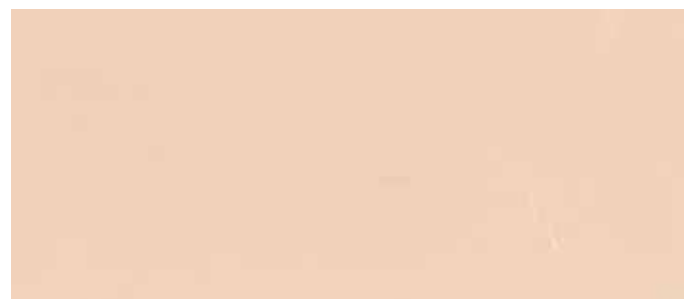

3009

Wall Pro+ is a homogeneous flexible vinyl sheet developed from a vinyl floor covering which complies with EN649. It is designed to be permanent wall covering, fully resistance to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. It receives PUR Protection surface treatment with excellent cleaning characteristics, improved resistance to scratching.

Wall Pro+ is fully impact resistant and is therefore ideal for use as a cladding in large public building such as hospitals, care institutions dental and veterinary surgeries, cleaning rooms etc.

INSTALLATION

Installation should be carried out in accordance with local standards, All surfaces to be primed and allowed to dry overnight prior to the application of the vinyl sheet. The materials must be allowed to acclimatize 24 hours before installation in a room temperature of between 18°C-24°C. All seams must be heat welded using Jeoflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the wall covering. Wall Pro+ should be maintained using neutral cleanser.

DESCRIPTION			
Total thickness	EN 428	mm	1
Weight	EN 430	g/m ²	1750
Width / Length of sheet	EN 426	cm / lm	2 / 20
CLASSIFICATION			
Norm / Product specification	-	-	EN 15 102
Fire rating	EN 13501	class	B-s2,d0
PERFORMANCE			
Dimensional stability	EN 434	%	≤ 0.40
Residual Indentation	EN 433	mm	≤ 0.10
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical product resistance	EN 423	-	OK
Anti-bacterial activity (Ecoli-5 aures- MARSa)	ISO 22196	-	inhibits growth >99%
Surface treatment	-	-	PUR+ Protection
Colour number	-	-	8
CE MARKING CE			
CE	EN 14041	-	

