

WONDERFLOOR



LUX LINE CO

KRAYONS

PUR


MADE
in
INDIA

School Flooring



LUX LINE CO

KRAYONS

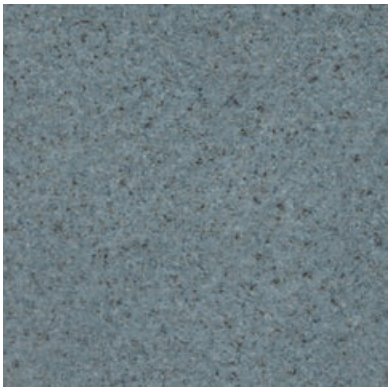

FROSTY SEA BLUE



FROSTY N ORANGE



FROSTY N RED



FROSTY N YELLOW




FROSTY N BLUE



FROSTY N GREY




FROSTY N BEIGE

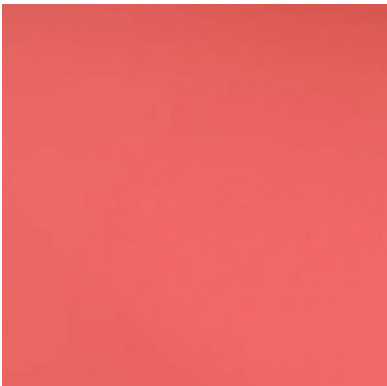

PASTEL PINK




PASTEL ORANGE

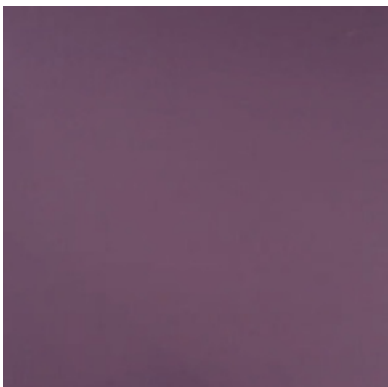

PASTEL PURPLE



PASTEL CHERRY

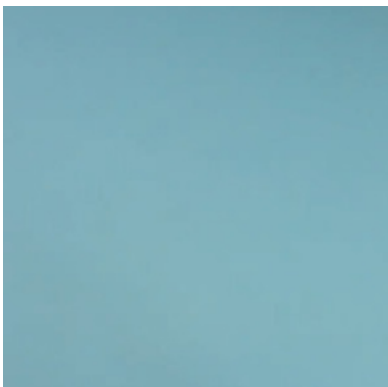


PASTEL BLUE




LUX LINE CO

KRAYONS

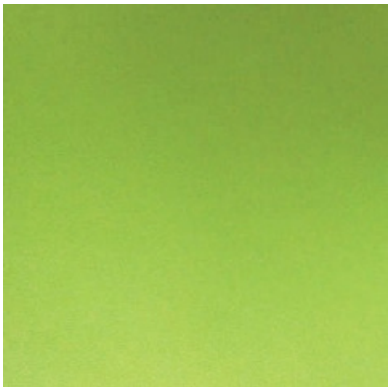

FLUORESCENT

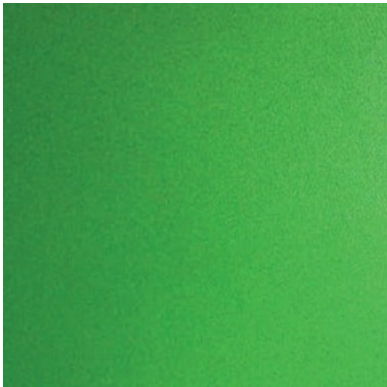

PASTEL GREEN



PASTEL LEMON



Salient Features

- Superior shock absorbing cushion base layer
- Specially formulated abrasion resistant wear layer
- **PUR** surface protection for ease in maintenance with stain resistance
- Glass Fibre Impregnation to provide better dimensional stability
- The product is suitable for medium traffic areas
- Application areas: Pre Schools & Kindergarden schools, fitness centre, schools, yoga centres, hospitality etc.
- Wear Group **P**



Slip resistant and impact resistant for child safety

WONDERFLOOR -The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

KRAYONS is designers delight and a medium to get imaginative and creative by a mix-and-match of different shapes, sizes and colours. Application Areas - It is ideal for schools, educational institutions, playgroup areas, activity areas, children rooms in homes etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TESTMETHOD	KRAYONS
THICKNESS (MM)	EN 428 / ISO 24346	2.00
ROLL WIDTH (MTR)	EN 426 / ISO 24341	2.00
ROLL LENGTH (MTR)	EN 426 / ISO 24341	20
TOTAL WEIGHT (KGS/SQ MTR)	EN 430 / ISO 23997	1.8
SURFACE PROTECTION	PUR	PUR PROTECTION
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	INHIBITS GROWTH OF MICROBES, CLASS A
RESIDUAL INDENTATION (MM)	EN 433 / ISO 23543-1	≤0.12 MM
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS
RESISTANCE TO CHEMICALS	ASTM F925	NO VISIBLE CHANGE - PASS
REACTION TO FIRE (kw/m2)	EN ISO 9239-1	CflS1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	33, 43
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP P
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 14db
THERMAL RESISTANCE (m2k/w)	EN 12664 / ISO 8302	<0.00568 - PASS
STAIN RESISTANCE	EN 423 / ISO26987	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-BO2	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.
Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

CONTACT INFORMATION



Phone Number:
+91 7680075590



Email Address:
info@Luxlineco.com



Website:
www.Luxlineco.com



Location:
8-1-523/300, Brindavan Colony
Tolichowki, Hyderabad,
Telangana - 500008

